

nifty



HR10 SELF PROPELLED ACCESS PLATFORM



10m (32ft 10in)
Working height


4.50m (14ft 9in)
Working Outreach

Weight Only 2,130kg
Low cost transportation

Bi-Energy Available
Optimising utilisation

**Fully Proportional
Hydraulic Controls**
Simple, reliable &
easy to maintain

1.50m Chassis
Improving narrow aisle access

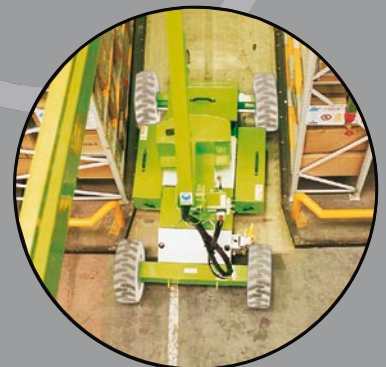

niftylift.com






nifty Height rider 10

The Nifty **Height Rider 10** provides excellent reach capabilities from a compact and very low weight base. Its narrow chassis allows better access to restricted areas and a tight turning circle means superb manoeuvrability. Transportation is easy due to its low overall weight and a choice of power options makes this an ideal entry machine to the self-propelled market.

SAFETY FEATURES

- Automatic Fail-safe Brakes
- Tilt Alarm
- Foam Filled or Solid Tyres
- Dual Controls (Platform & Base)
- Manual Recovery with Hand Pump
- Dual Harness Points
- Lock Valves on all Hydraulic Cylinders
- CE Mark

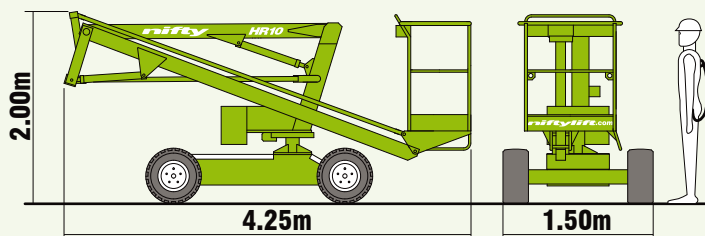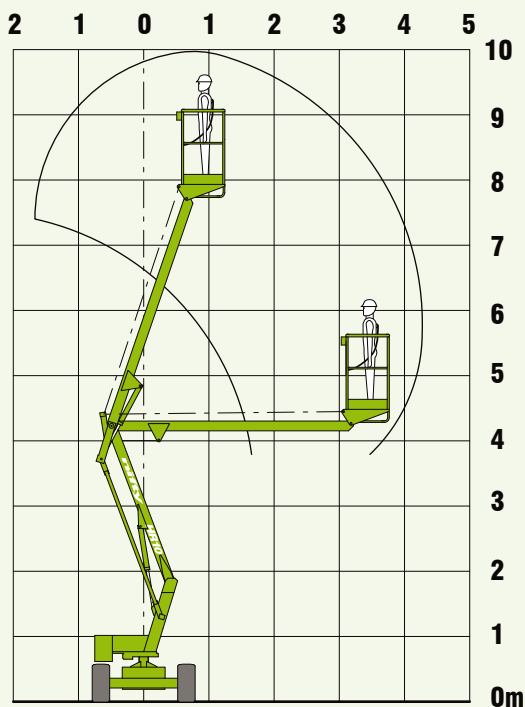

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.

The **Height Rider 10's** 1.50m chassis width make it ideal for working in restricted areas such as factories or warehouses.



With fully proportional hydraulic controls, the **Height Rider 10** is easy to operate and simple to maintain, making it ideal for a wide range of applications.

SPECIFICATIONS

Working Height	10m	32ft 10in
Platform Height	8m	26ft 3in
Working Outreach	4.50m	14ft 9in
Slew	360°	
Width	1.50m	4ft 11in
Height	2.00m	6ft 7in
Length	4.25m	13ft 11in
Minimum Weight	2,130kg*	4,700lbs*
Turning Radius - Inside	2.25m	7ft 5in
- Outside	4.20m	13ft 9in
Platform Capacity	200kg	440lbs
Platform Size	1.10m x 0.65m	3ft 7in x 2ft 2in
Drive Speed	2.1mph	3.4kph
Gradeability	25%	
Control System	Fully proportional hydraulic	
Power System	Battery Only Petrol, Diesel or LPG Only Bi-Energy (Engine & Battery)	

* Weights may vary according to specification / power options, please confirm before ordering.

Supplied by:

Manufacturers of trailer mounted, self propelled and vehicle mounted platforms.

NIFTYLIFT LTD
Fingle Drive
Stonebridge
Milton Keynes
MK13 0ER
England

www.niftylift.com

e.mail: info@niftylift.com

Tel.: +44 (0)1908 223456

Fax.: +44 (0)1908 312733

